

**Innovative, the wireless charge indicator has been made for real-time monitoring of 12V & 24V battery charging for all vehicles. Easy to use with its dedicated application (to download), it will keep the test history to improve the management of the fleet of vehicles.**

## 100% COMPATIBLE WITH ALL LEAD-ACID BATTERIES

- Batteries LIQUID / START & STOP / AGM / EFB / GEL
- Capacity from 7 to 230 Ah
- Conform with lead acid batteries 12V and 24 V (motobike, VL, PL,...)




## INTUITIVE APPLICATION


- Ergonomic interface and easy use
- Full test report (time, date, name,...)
- Result sharing by e-mail
- Test history
- Line connection : 10 m



## INSTANT ANALYSIS


- Battery voltage (7 V to 32 V)
- State of charge and battery health easy to read :

 > 12,5 V	The battery is fully charged.
 11,8 > 12,4 V	The battery is slightly discharged, it can be recharged.
 < 11,7 V	The battery is discharged, please recharge it immediately or replace it.

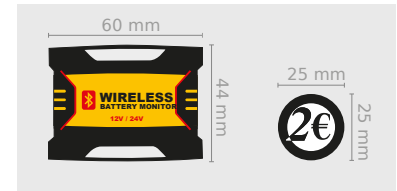







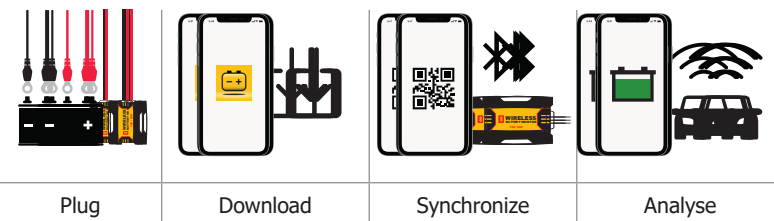
## ERGONOMIC INDICATOR

- Compact and very muted
- Waterproof housing
- Operation temperature from -20°C to +85°C



■ Application (iPhone iOS 7.0+ / Android OS 4.3+)  
Free & multilingual 

		TEST	 mm	 mm	IP				 kg
	12-24 V 7>230 Ah	• min 7 V	60 x 44 x 14	280 x 65 x 45	IP65	1A	60 cm	v4.0	0.4